



JOB:  
ITEM:  
QTY:



# “Z” Type Nesting Racks



**Virtually maintenance free, our racks are built for the long haul.** All welded construction insures the maximum strength and stability of each rack...Shipped assembled for immediate use. Supporting cross braces have gussets securely welded into place to prevent “racking”..

## “Worry Free” Handling

Specially designed to hold trays by the bottom insuring equal load distribution for easy, “worry-free” handling. Heavy duty aluminum tube and angle slides maximize strength and durability.

## Easy to Maneuver


Equipped with four 5” heavy duty platform type casters, these all welded aluminum carts are built to be pushed around. Non-marking wheels protect floors and minimize noise.

## Guaranteed To Last

Guaranteed to last, each rack carries a **Lifetime Guarantee** against rust and corrosion as well as a **Five-Year Guarantee** against material defects and workmanship.

## Sanitary

Each unit is all welded with all seams fully welded and sealed providing a smooth, easy to clean surface. No cracks or crevices to trap dirt!

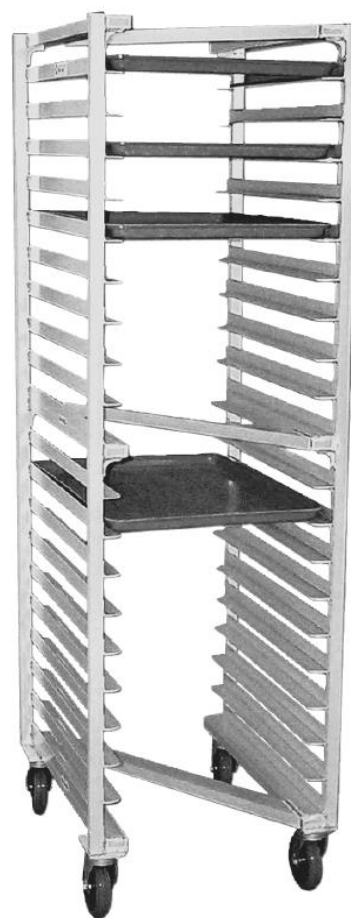

Model #1331Z



Phone: 800-255-0104  
Fax: 877-877-7687  
[www.newageindustrial.com](http://www.newageindustrial.com)  
[sales@newageindustrial.com](mailto:sales@newageindustrial.com)

New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.

## SPECIFICATIONS

**MATERIAL:** Hi-tensile, corrosion resistant, rust proof, primary extruded aluminum, Type 6463-T5 alloy.

**CONSTRUCTION:** All heli-arc welded with all seams welded and sealed (no rivets).

**SIDES:** Each side had two vertical posts of 1" x 1" x .070 wall tube. Welded to each side are angle runners of 1 1/4" x 1 5/8" x .100 wall aluminum angle, spaced on 2" or 3" centers.

**HORIZONTAL "Z" SUPPORTS:** Three "Z" support constructed of 1" x 2" tube, welded into a "Z" shaped unit.

**CORNER GUSSETS:** Gussets of 1 1/2" x 1 1/2" x 5/8" thick angle are welded to the inside angles (bottom side) where horizontal cross bracing meets vertical uprights.

**Note: Each gusset requires 4 1/2" of weld.**

**BASE:** A "Z" support frame with pre-tapped plates welded to each corner.

**CASTERS:** Platform type, 5" diameter wheel, full swivel design with sealed ball bearing axle. Wheel material is non-marking polyurethane.




**NSF Certified.**

Model No.	Size-W	Size-H	Size-D	Runner Spacing	Pan Cap.	Wt.
1330Z	20 1/2"	69 3/4"	36"	5"	30	86#
1331Z	20 1/2"	69 3/4"	36"	3"	20	72#

Four 5" platform casters (C450)

### OPTIONS:

- **Caster locks (2)**-Add "CL" suffix to model #
- **Vertical Bumper (4)**-Add "VB" suffix to model #

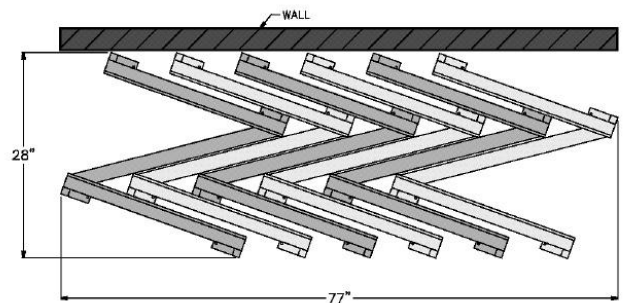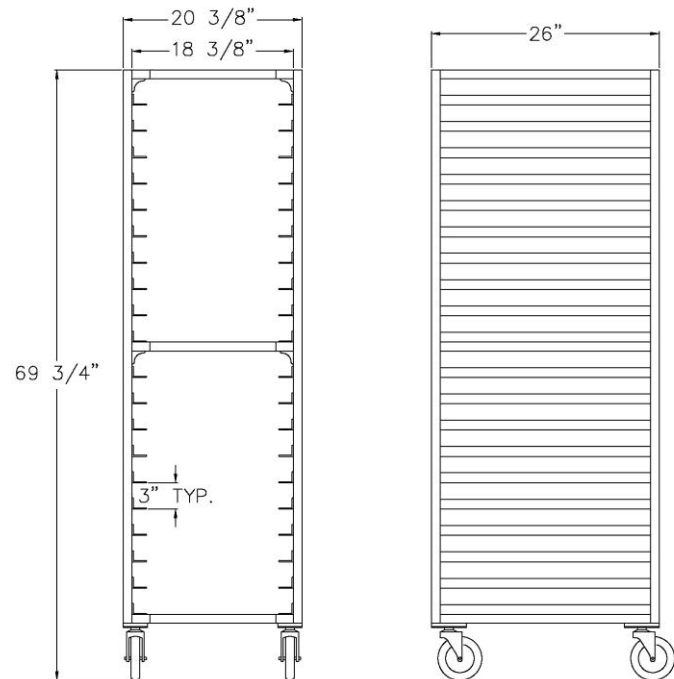

Phone: 800-255-0104  
 Fax: 877-877-7687  
[www.newageindustrial.com](http://www.newageindustrial.com)  
[sales@newageindustrial.com](mailto:sales@newageindustrial.com)

New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.